


CUSTOMER		
REV. NO.	DATE	REASON OF REVISION
1	89.10.13	ADJUSTMENT
2	02.10.28	USER'S REQUIREMENT

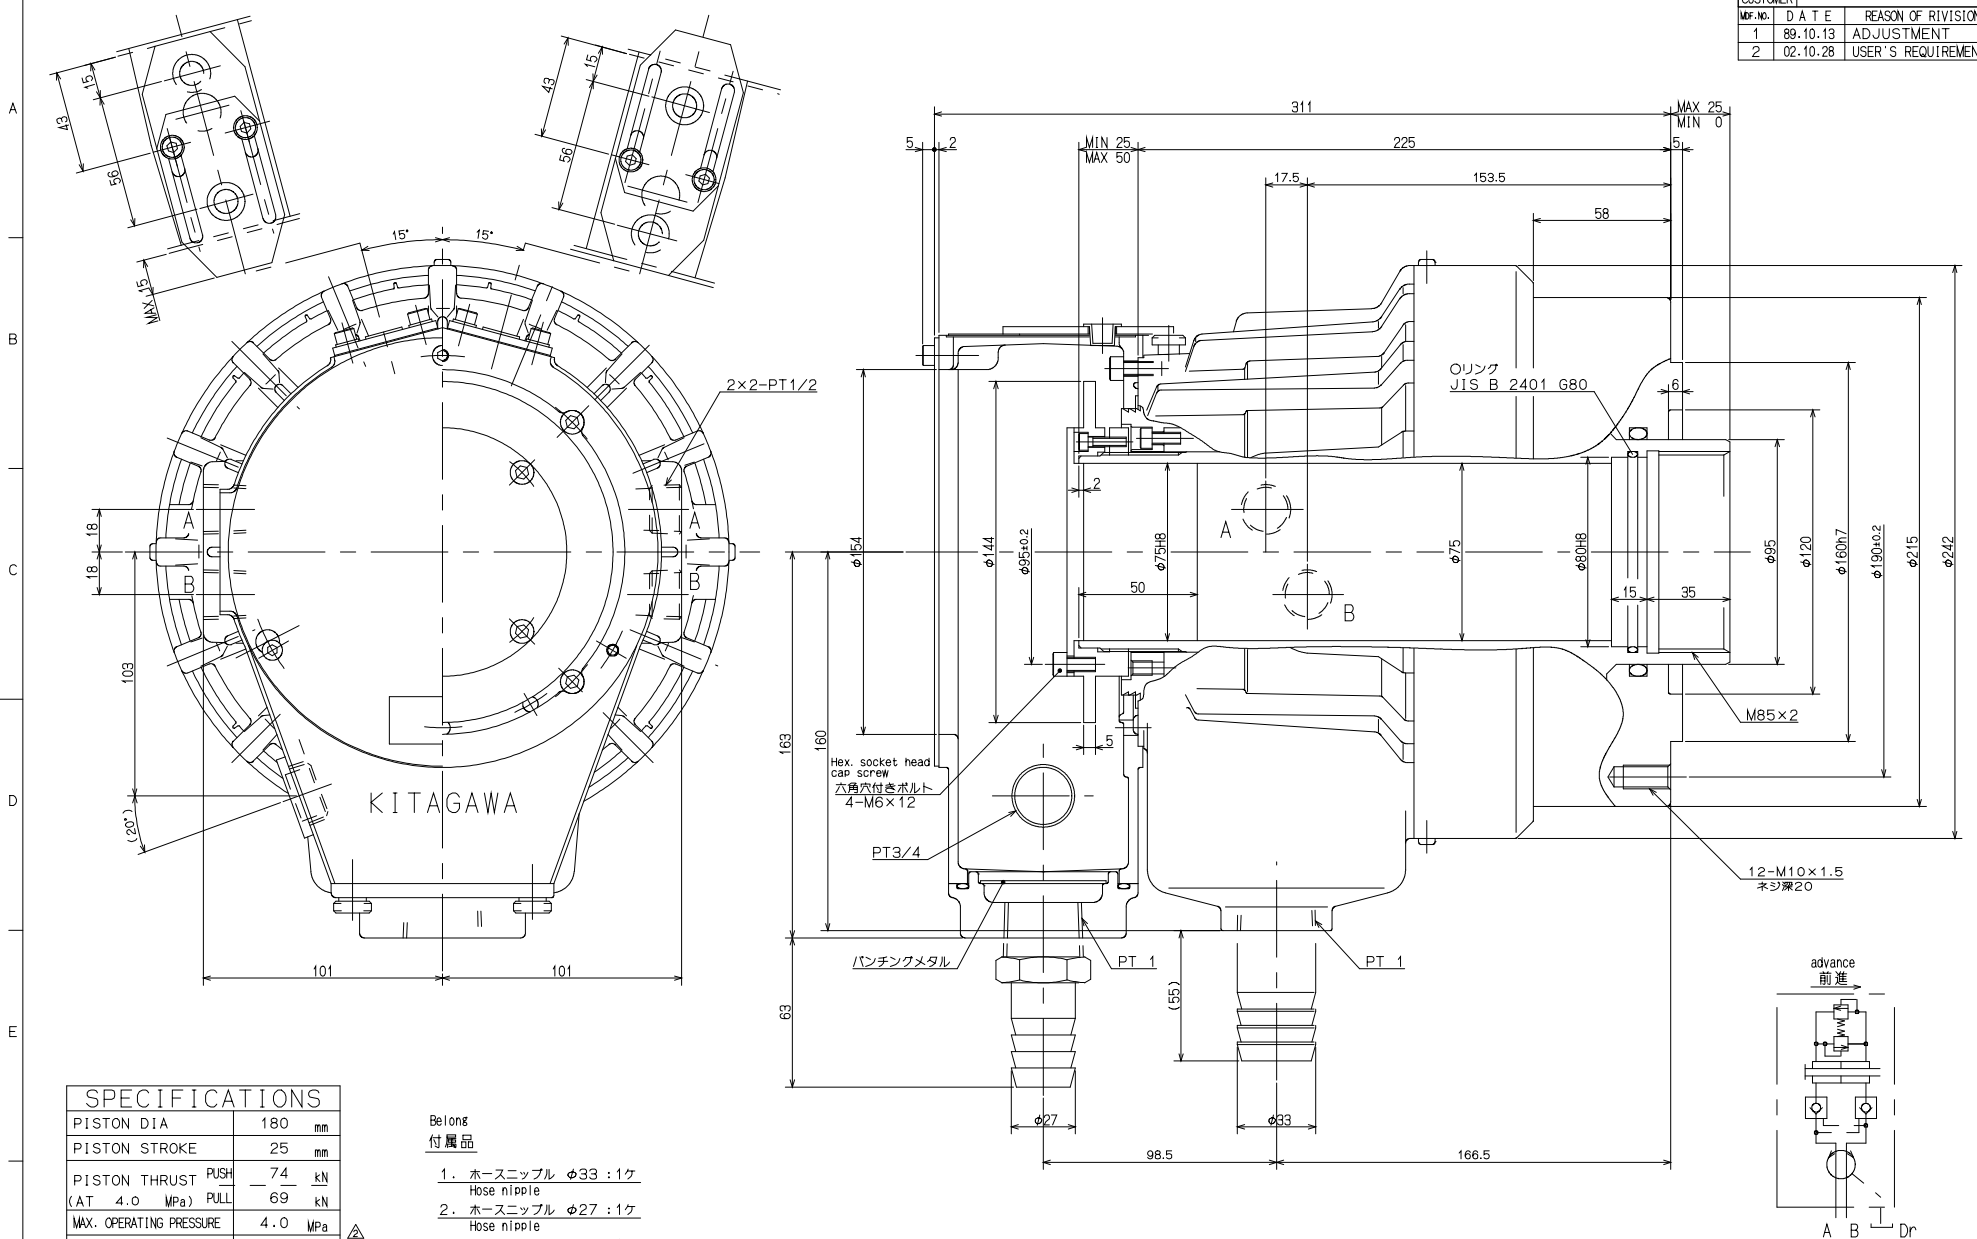

SPECIFICATIONS	
PISTON DIA	180 mm
PISTON STROKE	25 mm
PISTON THRUST PUSH (AT 4.0 MPa)	74 kN
PULL	69 kN
MAX. OPERATING PRESSURE	4.0 MPa
MAX. SPEED	5000 min ⁻¹
MASS	30 kg
MOMENT OF INERTIA	0.095 kg·m ²
OIL LEAKAGE ISO VG 32, 50°C, 3.0MPa	4.2 l/min

- Belongs
付属品
- ホースニップル φ33 : 1ヶ
Hose nipple φ33 : 1
 - ホースニップル φ27 : 1ヶ
Hose nipple φ27 : 1
 - パンチングメタル : 1ヶ
Punching metal : 1
 - リング G80 : 1ヶ
O-ring G80 : 1
 - 六角棒スパナ 4 : 1ヶ
Hex. key 4 : 1
 - 六角棒スパナ 5 : 1ヶ
Hex. key 5 : 1

CAREER			SCALE	TYPE	S1875-15Y	WEIGHT	kg
MANAGER	CHIEF	DRAWN BY	2:3	NAME	S1875-15Y		
		内海	3RD ANGLE		S1875-15Y		
KITAGAWA IRON WORKS CO.,LTD.	DATE	88.12.07		DRW NO.	61R219153		